


Coaxil RG 6 67% Trishield – S/Portante

Amphenol 
Broadband Solutions

TFC Coaxial Cable Product Information Sheet
Type: T6T60-U BLACK

Series 6 Coaxial Cable
Copper Clad Steel Conductor
Foamed Polyethylene Dielectric
Bonded APA Laminate Shield
60% Aluminum Braid
APA Laminate Shield
Black PVC Jacket, Temperate Climate

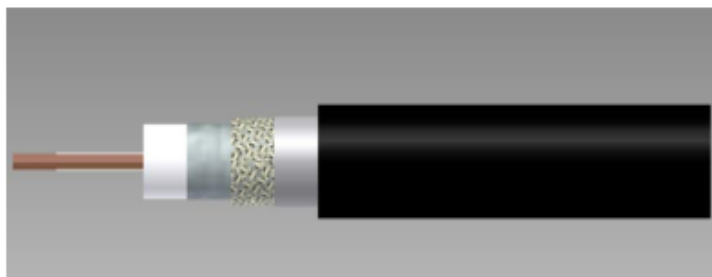

DESCRIPCION

Cable RG 6 67 % Trishield

MODELO

T6T60-VB/B

CODIGO WT

4081310

Casa Central

Domingo French 831, B1603BNI, Villa Martelli, BS AS, Argentina
Tel:(54) 011-4709-6650
ventas@wiretechsa.com.ar

Sucursal Córdoba

Diaguitas 3138, Córdoba, CP 5008, Argentina
Te:(54) 0351 476-1313 – 0908
sucursalcordoba@wiretechsa.com.ar

1 – Parámetros

Cable Ordering Information

Part Number	Description	NEC / CSA Listing
006T60V00BK0010000R1	T6T60-U BLACK	none

Characteristics

Material	Detail	inches	mm
Inner Conductor	Copper Clad Steel	0.0403	1.02
Dielectric	Foamed Polyethylene	0.180	4.57
1 st Outer Conductor	Sealed APA Tape	0.188	4.78
2 nd Outer Conductor	60% Aluminum Braid	0.212	5.38
3 rd Outer Conductor	APA Tape	0.216	5.49
4 th Outer Conductor	---	---	---
Floodant	---	---	---
Jacket	PVC, Black	0.278	7.06
Twisted Pairs	---	---	---
Messenger	---	---	---

Mechanical Specifications

Minimum Bend Radius, in. (mm)		1.0	(25.40)
Product Weight	(less reel)	27 lbs /kft	

Electrical Specifications

Impedance, Ω	75 \pm 3	
Velocity of Propagation, %	85	
Capacitance, Nominal	16.2 pF/ft	53.2 pF/m
DC Resistance	Ω / kft	Ω / km
Inner Conductor	31.0	102
Outer Conductor	6.88	23
Loop	37.9	124

Attenuation, Maximum @ 68 °F (20 °C)

Frequency, MHz	dB / 100 ft	dB / 100 m
5	0.58	1.90
55	1.60	5.25
211	3.05	10.01
250	3.30	10.83
270	3.37	11.06
300	3.55	11.65
330	3.74	12.27
350	3.85	12.63
400	4.15	13.62
450	4.40	14.44
500	4.66	15.29
550	4.90	16.08
600	5.10	16.73
750	5.65	18.54
870	6.11	20.05
1000	6.55	21.49