


CONECTOR .750 - 3 Cuerpos con PIN - 5/8



Dimensions:

A: Hex Dimension 1.25 inches
 B: Overall Length (installed) 3.11 inches

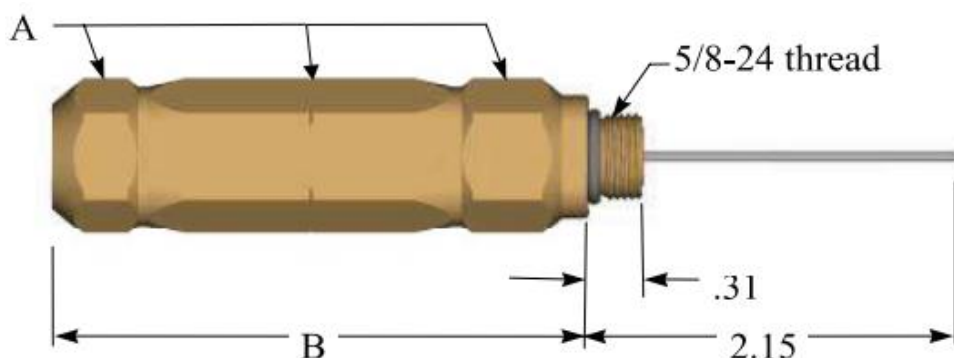

Product Specifications

Bandwidth	0 MHz to 1 GHz
Impedance	75 Ohms
Return Loss	Better than -30 dB to 1 GHz
Insertion Loss	Less than .10 dB to 1 GHz
Operating Voltage	90 V (at 60 Hz continuous AC)
Operating Current Rating	20 Amps (at 60 Hz continuous AC)
Operating Temperature	-40° F to + 140° F (-34° C to 60° C)

Meets or Exceeds all SCTE Specifications

Part Numbers

TPP750P3	Hardline 3pc Pin Cable to Pin Connector for 750 P3 cable
----------	--

Preparation & Installation Tools

- Two(2) 1^{1/4}" wrenches
- Cutters for pin of connector
- Appropriate Cable preparation tool

MODELO

TPP750P3

CODIGO WT

4091517

Casa Central

Domingo French 831, B1603BNI, Villa Martelli, BS AS, Argentina
 Tel:(54) 011-4709-6650
 ventas@wiretechsa.com.ar

Sucursal Córdoba

Diaguítas 3138, Córdoba, CP 5008, Argentina
 Te:(54) 0351 476-1313 – 0908
 sucursalcordoba@wiretechsa.com.ar