


Encoder 8:1 HDMI H264 HD Salida IP.



DEING

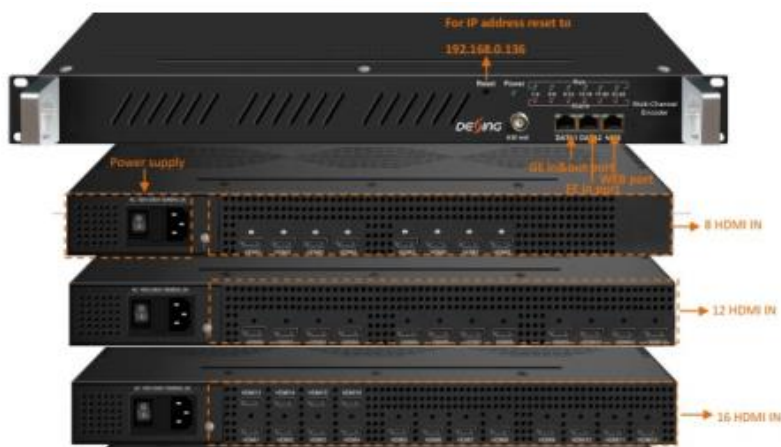

DESCRIPCION

Encoder Entradas HDMI H264 HD. Salida ASI /IP Opción 8 Entradas

MODELO

NDS3542L8

CODIGO WT

4223408

Casa Central

Domingo French 831, B1603BNI, Villa Martelli, BS AS, Argentina
Tel:(54) 011-4709-6650
ventas@wiretechsa.com.ar

Sucursal Córdoba

Diaguitas 3138, Córdoba, CP 5008, Argentina
Te:(54) 0351 476-1313 – 0908
sucursalcordoba@wiretechsa.com.ar

4 – Especificaciones Técnicas

Input	12 HDMI inputs (8//16/20/24 input optional)		
Video	Resolution	input	1920×1080_60P, 1920×1080_60i, 1920×1080_50P, 1920×1080_50i, 1280×720_60P, 1280×720_50P, 720×576_50i,720×480_60i,
		output	1920×1080_30P, 1920×1080_25P, 1280×720_30P, 1280×720_25P, 720×576_25P,720×480_30P,
	Encoding	MPEG-4 AVC/H.264	
	Bit-rate	1Mbps~13Mbps each channel	
	Rate Control	CBR/VBR	
	GOP Structure	IP...P (P Frame adjustment, without B Frame)	
Audio	Encoding	MPEG-1 Layer 2	
	Sampling rate	48KHz	
	Resolution	24-bit	
	Audio Gain	0-255 Adjustable	
	Bit-rate	64kbps,128Kbps,192kbps,224kbps,256kbps, 320kbps,384kbps	
Multiplexing	Maximum PID Remapping	180 input per channel	
	Function	PID remapping (automatically or manually)	
		Accurate PCR adjusting	
		Generate PSI/ SI table automatically	
Stream output	12 SPTS (8/16/20/24 SPTS) IP or 1MPTS output over UDP/RTP, 1*1000 Base-T Ethernet interface ASI output(optional) as copy of MPTS		
System function	Network management(WEB)		
	Chinese and English language		
	Ethernet software upgrade		
Miscellaneous	Dimension(W×L×H)	482mm×410mm×44mm	
	Approx weight	8kg	
	Environment	0~45℃(work); -20~80℃ (Storage)	

5 – Opciones de Modelos

	NDS3542L-8	NDS3542L-12	NDS3542L-16	NDS3542L-20	NDS3542L-24
8 HDMI Input with 8 SPTS out	●				
12 HDMI Input with 12 SPTS out		●			
16 HDMI Input with 16 SPTS out			●		
20 HDMI Input with 20 SPTS out				●	
24 HDMI Input with 24 SPTS out					●