


## FILTRO ELIMINABANDA 2/78



Model: **SNBR-2/78**      Prep. By S.S.      Date: 5/21/2008  
 Response: Sample      Minimum operating frequency: 1 Ghz


Marker #	Freq. Desc.	Freq. Mhz	Typ. Loss(dB)	Limits(dB)
1		42	2.0	4.0 max.
2	3 Vid.	61.25	56	48 min.
3	70 Vid.	499.25	50	40 min.
4	79 Vid.	553.25	2.6	4.0 max.
5		600	1.1	1.1 ref.
6		750	0.8	0.8 ref.
7		860	0.6	0.6 ref.
8		1000	0.4	0.4 ref.

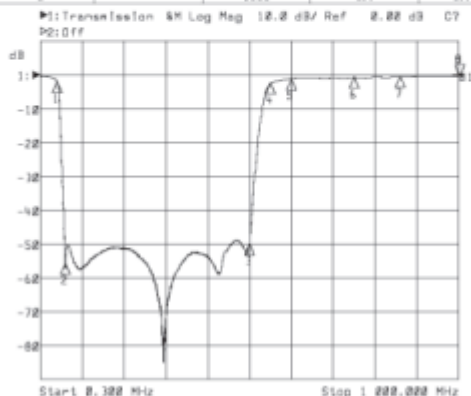

### Features

- 100% Surface Mount Technology for consistent performance
- Compact, single-piece construction
- Improved insertion loss over downstream pass band minimizing modem dropout
- Precision four-point female seizure contact
- Moisture-sealed connector interfaces
- SCTE compliant connector interfaces
- 7/16 hex allows for standard tool installation

### SNBR-2/78

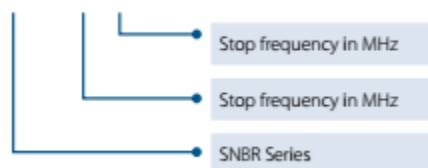

**MODELO**

**SNBR278**

**CODIGO WT**

**4181021**

#### Casa Central

Domingo French 831, B1603BNI, Villa Martelli, BS AS, Argentina  
 Tel:(54) 011-4709-6650  
 ventas@wiretechsa.com.ar

#### Sucursal Córdoba

Diaguítas 3138, Córdoba, CP 5008, Argentina  
 Te:(54) 0351 476-1313 – 0908  
 sucursalcordoba@wiretechsa.com.ar